

How to change the bunks on your lift!



Step 1

Start off by removing your old bunks.


You could use a 1/2" socket on an impact gun or a ratchet will do. If the bolts are stripped, you may have to cut them off.



~Tips~

Replacing you bunks...

Take note of the spacing from the end of your bunk post to the end of the bunk to match when you install the new one!

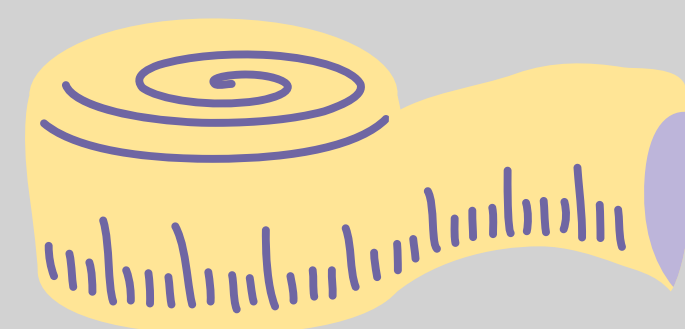

Step 2


Once the old bunks are full removed, including the old hardware, you are now ready to attach your new bunk set.

Place the bunks in the same location as the old bunks.



Step 3

Using a long drill bit, drill through the bunk post, into the bunk so you can find your newly made hole with the carriage bolt

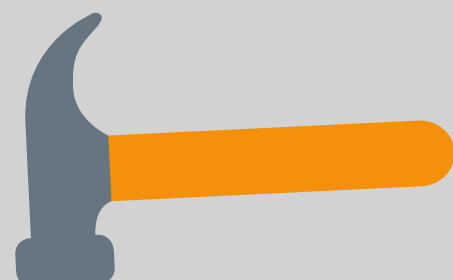

Use a hammer to hit the head of the carriage bolt into the wood.



Installer tip!

Make sure the bunk is sitting down on the bunk post all the way. This will ensure full support for you boat.



Step 4

Put a 1/2" flange nut on the carriage bolt and tighten it down. Make sure all the bolts are in a tight before placing your boat back on your lift!



Call us any time, we are happy to help!

If you have any questions, or are stuck, feel free to give us a call!

